


Description


The SK humidifier is equipped with an optional 5 microns PP prefilter and silver ion filter option. The 5 microns PP pre-filter and silver ion dosing cartridges are designed to prevent microbial growth.



Installation

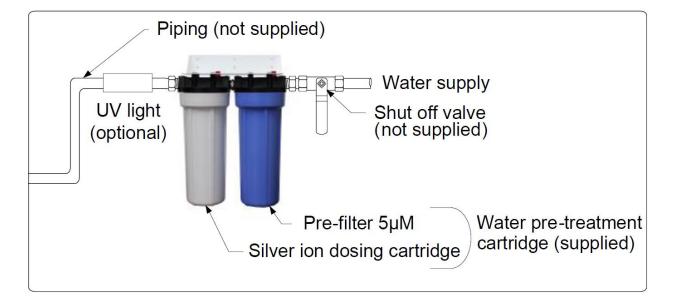

Filter Pressure Loss

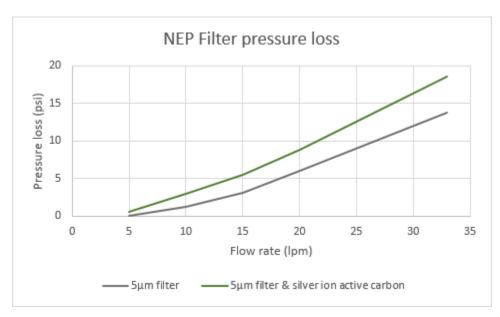



Silver Ion Filter & 5 Microns PP Pre-filter


Technical Specifications

Specification		Cartridge
Inlet and outlet size	SKVF, SKH	½" [DN15]
	SKV	¾" [DN20]
Material		Polypropylene
Maximum pressure		125 PSI [862 kPa]
Bursting pressure		500 PSI [3447 kPa]
Endurance pressure cycle		0-150PSI for 1000000 cycles
Maximum temperature		120°F [50°C]

Specification	5 Microns PP Pre-filter
Pore size	5μm
Filter media material	Multi-layered polypropylene fiber

Specification	Silver Ion Filter
Maximum flow rate	0.75 GPM [114 l/h]
Maximum pressure	125 PSI [862 kPa]
Maximum temperature	100°F [38°C]
Filter material	Nano silver carbon
Service life	2000-2500gal [7571-9464L]

Dimensions

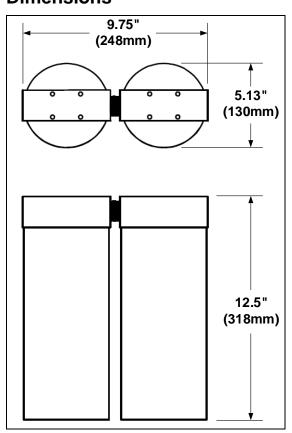

www.neptronic.com Page | 2