



Models


- SPD00-010
- SPD00-020
- SPD00-050

Description

Measures the pressure differential and converts the value to an analog signal (mA or Vdc). Primarily used in conjunction with a controller for bypass damper actuators in VAV systems.

Features

- Small footprint
- Simple and easy to install
- Selectable analog output signal range
- High flow impedance in the range of tens to hundreds of kPa

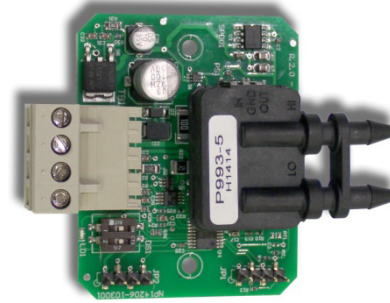


SPD Series

Technical Specifications

Description	SPD00-010	SPD00-020	SPD00-050
Measurement range	0-1" WC (0-0.25 KPa)	0-2" WC (0-0.5 KPa)	0-5" WC (0-1.25 KPa)
Power supply	24 Vac or Vdc (±10%)		
Power consumption	2 VA		
Electrical connection	0.8 mm ² [18 AWG] minimum		
Pressure connection	1/8" (3.175mm) diameter tube fitting with barb for 3/16 ID tubing		
Signal outputs	0-10Vdc / 2-10Vdc and 4-20mA / 0-20mA DIP switch selectable		
Burst pressure	1.5 PSI (10.3 KPa)		
Operating temperature	0°C to 40°C [32°F to 104°F] Compensated: 5°C to 55°C [41°F to 131°F]		
Storage temperature	-40°C to 80°C [-40°F to 176°F]		
Humidity	0 to 85%RH (non condensing)		
Weight	0.05lbs (24g)		
Dimensions			

Overview

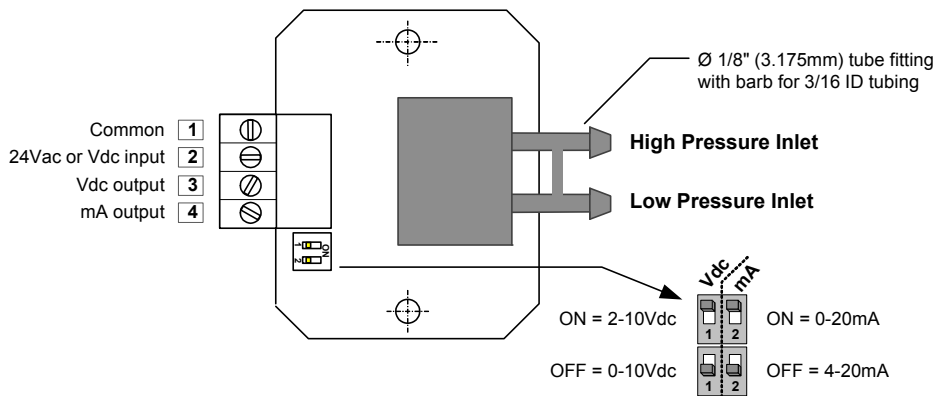

Recycling at end of life: please return this product to your Neptronic local distributor for recycling. If you need to find the nearest Neptronic authorized distributor, please consult www.neptronic.com.